


Data Sheet

LED Mini Flood Lights

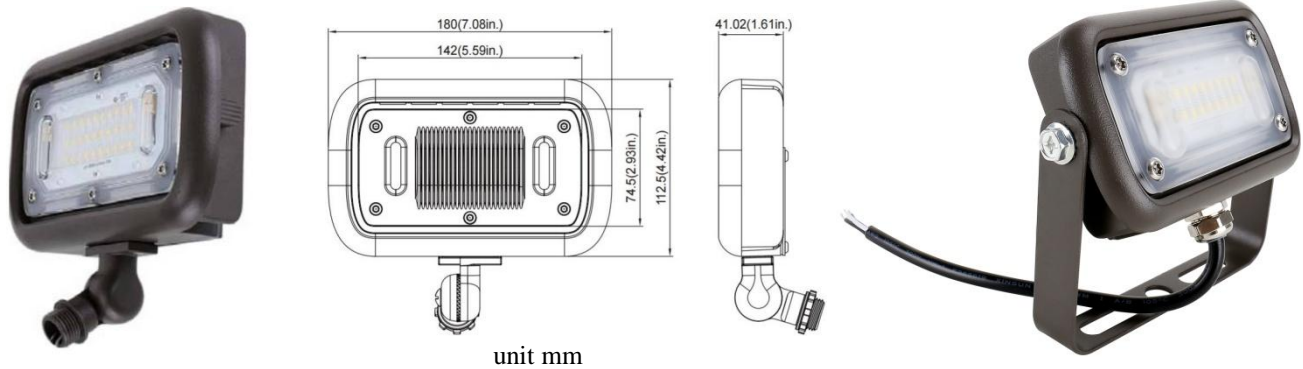

Parameters

Part Number	ZL-MFL-KN-50K-30W	ZL-MFL-YM-50K-30W	ZL-MFL-KN-50K-45W	ZL-MFL-YM-50K-45W
Lens	Clear			
Dimension	7.08" X 4.42" X 1.61"		8.26" X 7.9" X 2.37"	
Wattage	30W		45W	
Color Temperature	5000K			
Lumen Output	3000LM		5100LM	
Weight (lbs)	2		3	
Mounting	G 1/2" Knuckle Mount	Yoke	G 1/2" Knuckle Mount	Yoke
Input Voltage	120-277VAC			
Power Factor	0.9			
Viewing Angles	Flood			
CRI	70			
Finish	Rugged brown aluminum housing with UV resistant powder coating for outstanding corrosion protection			
Work Temp	-77 °F - 113 °F			
Dimmable	No			
LED Life	50,000 Hours			
Lens	Polycarbonate Suitable for outdoor use with respect to exposure to Ultraviolet Light, Water Exposure and Immersion in accordance with UL 746C			
Safety Ratings	UL Wet Location, IP66, DLC			
Warranty	5 years			

All Rights Reserved