


Light Distribution



Illumination Distribution

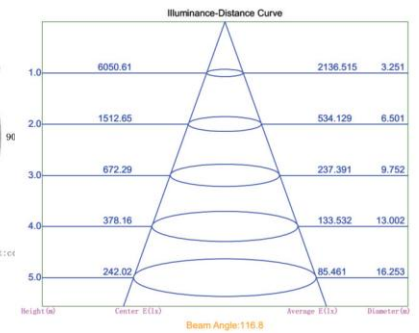

## Parameters

Part Number	ZL-UFOHighBay-50K-150W
HID Wattage Equivalent	500W
Initial Fixture Lumen Output	19500 LM
System Power	150W
Weight (lbs)	10 lbs
Input Voltage	120 - 277 VAC
Mounting	Chain / Direct Mechanic
Viewing Angles	120 Degree
CRI	80
Working Temperature	-20 °C -450°C; 10% - 90% RH
Color Temperature	5000 K
LED life (L70)	50,000 Hours
Dimmable	Yes, 0 - 10 V Dimming
Material	Aluminum + Plastic
Protection Rate	IP64, for Indoor Use Only
Rating	UL and DLC
Finish	Black
Warranty	5 Years

All Rights Reserved