

TECHNICAL DATA SHEET




NAME: LED Wall Pack

P/N: ZL-WP4-120W-50K

Advantage:

- UL cUL DLC certificate
- IP65 Internal driver, Input voltage 100-277VAC
- No UV or IR in the beam
- Easy to install and operate
- Energy saving, long lifespan
- Light is soft and uniform, safe to eyes
- Instant start, NO flickering, NO humming
- Green and eco-friendly without mercury.

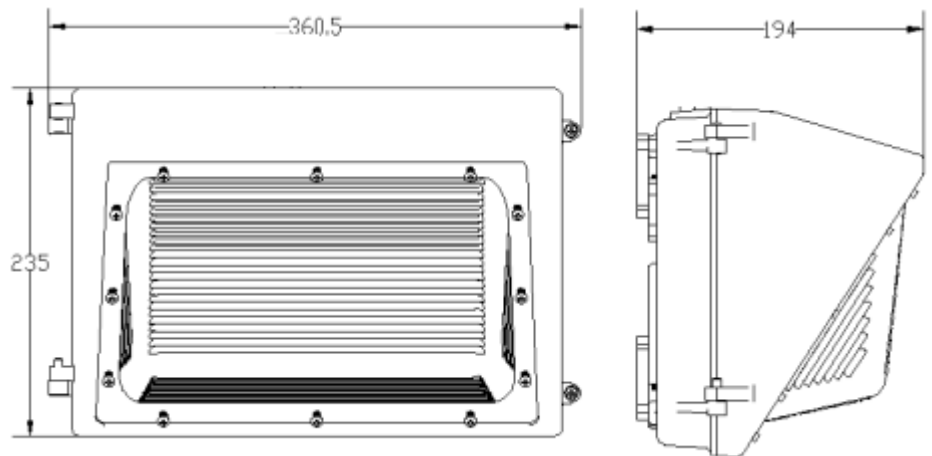

Application:

- ◆ entrance lighting, courtyard lighting
- ◆ Industrial lighting, Outdoor landscape lighting;
- ◆ Buildings
- ◆ Wall lighting area and so on.

TECHNICAL DATA SHEET

Product Specifications

Product name	LED Wall Pack
Part No	ZL-WP4-120W-50K
Dimension	360.5*235*194mm

Technical Characteristic

Color temperature	5000K
CRI	>80
Lumen	15000LM
Lumen Efficacy	125LM/W
Input Power	120W
Viewing Angle	110 Degree
Input Voltage	100-277VAC 50/60Hz
PF	>0.9
Waterproof Rating	IP65

Materials


LED Type	2835, 0.5W
LED QTY	420 PCS
Housing	Aluminum(ADC12) +PC
Housing color	Brown

Others

Operating Temperature	-20°C TO 45°C
Operating Humidity	20%-90% RH
Storage Temperature	-30°C TO 80°C
Storage Humidity	10%-95%
Application	Outdoor / Indoor
Safety Certification	UL、cUL、DLC
Warranty Time	5 Years

TECHNICAL DATA SHEET

Light Distribution Testing Parameters

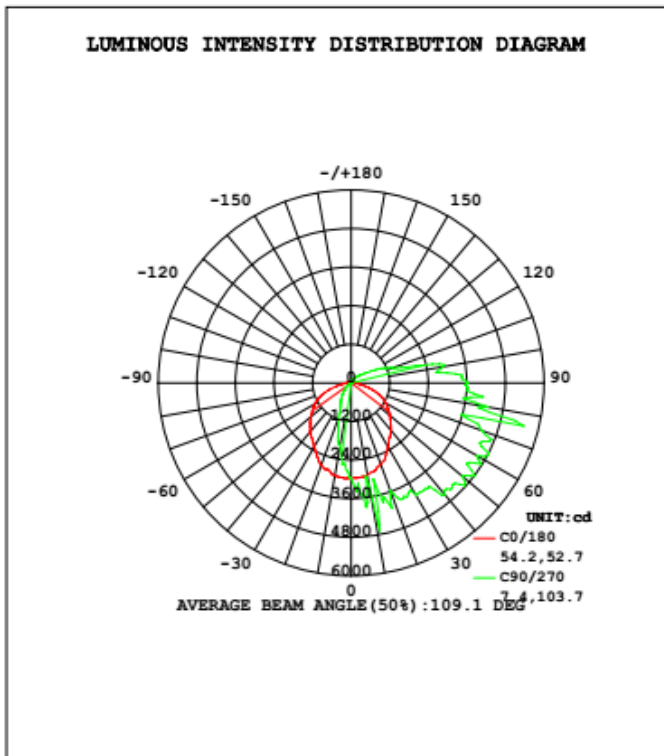

Flux out: 3616 lm

1m	1523,4451lx	170.89cm
2m	380.8,1113lx	341.78cm
3m	169.2,494.6lx	512.67cm
4m	95.20,278.2lx	683.56cm
5m	60.92,178.0lx	854.45cm
6m	42.31,123.6lx	1025.34cm
7m	31.08,90.84lx	1196.23cm
8m	23.80,69.55lx	1367.12cm
9m	18.80,54.95lx	1538.01cm
10m	15.23,44.51lx	1708.90cm

Height Eavg, Emax Angle: 81.02deg Diameter

Note: The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

Package

Lamps Net Weight: 4.85 kg / pc

	Size	Qty/ Carton	Weight/ Carton
Cardboard	400*300*245mm	1	5.9 KG

